ADVANCED DAYLIGHT FILTERING SYSTEMS





Climat Screen Twin consists of two layers: a screen and a dim-out roller blind or a dim-out foil.

Screen and curtain/foil both sit inside the same cassette, but can be operated separately.

CONTROL OPTIONS

The Compact System can be controlled in many ways, with a great flexibility towards the end user. The system is also self-braking.

- endless chain (and cord stopper)
- motorised (mains or battery current)
 - with remote control
 - via app (Smartware)

Climat Screen systems can be integrated with building automation systems, also known as Domotics.

TRANSPARENCY

There are three types of light transmission:

- OR: dim-out (105 mu thick)
- 2R (77 mu thick)
- 10R: most transparent (77 mu thick)

TYPE AND COLOURS

All types are available in eight types of foils.

- bronze-silver (2R and 10R)
- grey-silver (2R and 10R, also in B1-quality)
- silver-silver (2R and 10R)
- white-silver (OR)

CASSETTES

The cassettes are available in:

- 'Technical silver' anodised or enamelled in RAL 9001 of 9003 (standard option)
- In any desired RAL colour (surcharge)





FOREST CLIMAT SCREEN

TWIN SYSTEM


STABILIZATION

By applying horizontal folds in the foil, it achieves a higher stiffness. The subtle folds ensure stabilization and a beautiful, calmlooking pattern. The foil is also equipped with a special hammering finish (prisms). The folds can be applied in the following dimensions:

- 25 mm
- 40 mm
- 60 mm


DIMENSIONS

A cassette of only 81,5 x 54 mm with a roll-up capacity of 220 cm.

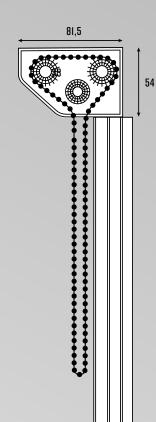







double channel
(sizes in millimeters)

